




GENERAL SHEET NOTES

1. STOCKPILE LOCATIONS (SP1 AND SP2) IDENTIFIED ON THIS PLAN ARE THE DEFAULT LOCATIONS. PRIOR TO AB MATERIAL TRANSPORT AND PLACEMENT OPERATIONS, CONTRACTOR SHALL COORDINATE WITH DISTRICT REPRESENTATIVE TO REVIEW AND CONFIRM OTHER CONSTRUCTION ACTIVITIES HAVE NOT MODIFIED THE STOCKPILE LOCATIONS.
2. THE FOLLOWING AB QUANTITIES (APPROXIMATE) SHALL BE TRANSPORTED TO EACH SITE:
 - SP1 - PLACE REMAINING BALANCE NOT TAKEN TO SP2
 - SP2 - PLACE 1,400 CY
3. CONTRACTOR SHALL COORDINATE WITH DISTRICT REPRESENTATIVE TO IDENTIFY ANY EXISTING UTILITIES THAT MUST BE PROTECTED IN PLACE IN THE STOCKPILE LOCATION.
4. UNLESS DIRECTED OTHERWISE, CONTRACTOR SHALL TRANSPORT AB MATERIAL VIA THE ROUTES SHOWN ON THIS PLAN.
5. MATERIAL SHALL BE CONSOLIDATED AND SHAPED INTO A SINGLE STOCKPILE WITHIN THE SPECIFIED STOCKPILE LOCATIONS. STOCKPILE HEIGHT SHALL BE MINIMUM 4 FEET HIGH WITH NO MAXIMUM HEIGHT REQUIREMENT. NO BMP'S ARE REQUIRED AT THE STOCKPILES.

AB SPOILS MATERIAL PLACEMENT PLAN

NO SCALE

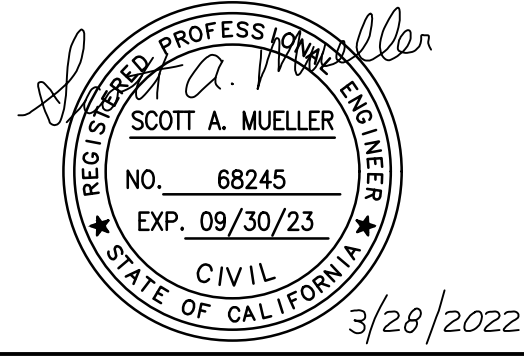

REVISIONS					
ZONE	REV.	DESCRIPTION	BY	DATE	APP.
	1	ADDENDUM #1	SM	4/11/22	

LINE IS 2 INCHES AT FULL SIZE (IF NOT 2"-SCALE ACCORDINGLY)

FILE _____
 DRAWN SM
 DESIGNED SM
 CHECKED DWT

RFB 8415

SACRAMENTO REGIONAL COUNTY SANITATION DISTRICT OF SACRAMENTO COUNTY, CALIFORNIA

SACRAMENTO REGIONAL WASTEWATER TREATMENT PLANT FINAL SITE IMPROVEMENTS (FSI) DEMOLITION OF TEMPORARY SIMS ROAD

AB SPOILS MATERIAL PLACEMENT PLAN

SCALE
NO SCALE

DRAWING NUMBER
CG101

SHEET NUMBER
7 OF 7